

Customer:

Customer Mode:

Customer Approve By:

REV.


A1

DESCRIPTION OF MODIFY

修改电压3v为5v, 半透改反射

DATE

2004-09-15

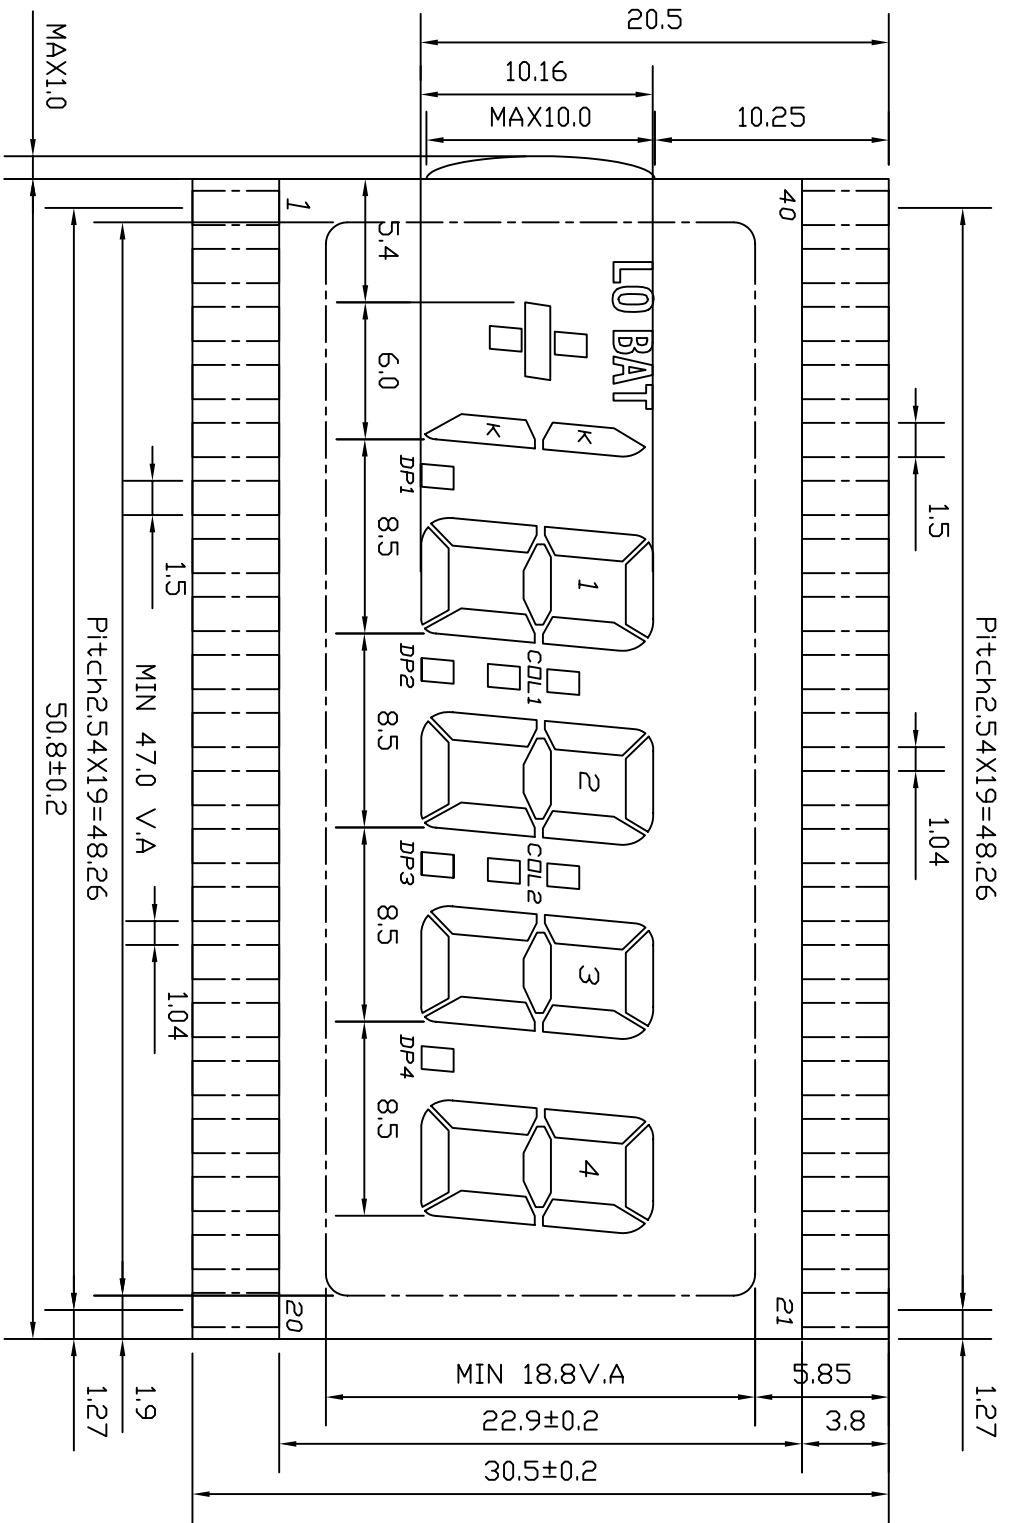

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
CDM	□	□	K	DP1	1E	1D	1C	DP2	2E	2D	2C	DP3	3E	3D	3C	DP4	4E	4D	4C	4B
PIN	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
CDM	4A	4F	4G	3B	3A	3F	3G	COL2	2B	2A	2F	2G	COL1	1B	1A	1F	1G	LO BAT	B	□

DISPLAY TYPE : TN, POSITIVE MODE
 POLARIZER MODE : REFLECTIVE
 CONNECTOR : PIN
 VIEW ANGLE : 6 O'CLOCK
 MULTIPLEX : 1/1 DUTY
 BIAS RATIO : 1/1 BIAS
 DISPLAY DRIVER : __
 OPERATING VOLTAGE : 5.0 V
 OPERATING TEMP : -20°C TO +70°C
 STORAGE TEMP : -30°C TO +80°C

DRAWN BY : N H J 2004-09-15
 CHECKED BY :
 APPROVED BY :

HAINAN QINGHUA LCD TECHNOLOGY DEVELOPMENT CO., LTD

海南清华显示器件技术开发有限公司

DWG NO.: HQ30609

REV: A1
 SIZE: A4
 SHEET: 1 OF 1
 SCALE: NTS

