


CUSTOM DESIGNED LCD CHECK LIST




1. Outline dimensions

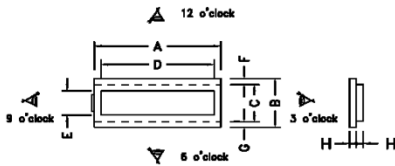

A	Length of glass	
B	Width of front glass	
C	Width of bottom glass	
D	Length of viewing area	
E	Width of viewing area	
F	Size of terminal part	
G	Size of terminal part	
H	Thickness of glass	<input type="checkbox"/> 1.1mm <input type="checkbox"/> 0.7mm <input type="checkbox"/> 0.55mm

2. Panel form

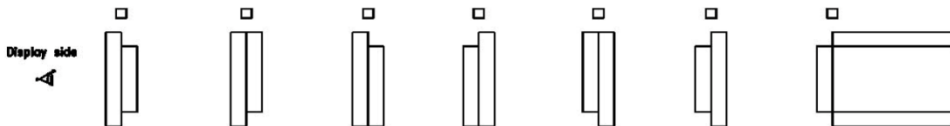

3. Mode of display

3.1 LCD type

- TN
- HTN
- STN
- FSTN
- Extra Black
- Yellow-Green
- Gray
- Blue (Negative)

3.2 Display type

- Positive
- Negative

3.3 Polarizer type

- Reflective
- Transflective
- Transmissive

3.4 Polarizer

- Normal
- Anti-glare
- Anti-UV

4. Viewing direction

- 6 O'clock
- 12 O'clock
- 3 O'clock
- 9 O'clock

5. Driving Method

Driving LSI _____
 Operating voltage _____ V
 Operating frequency _____ Hz
 _____ Duty _____ Bias

6. Connection

- Elastomer
- Heat seal
- Metal pins
 - Pitch 2.54mm
 - 2.00mm
 - 1.80mm
 - 1.50mm

No. of metal pins _____
 Pin length _____ mm

7. Environmental Condition

7.1 Operating temperature range

- 0 °C to 50 °C
- _____ °C to _____ °C

7.2 Storage temperature range

- 20 °C to 60 °C
- _____ °C to _____ °C

8. Pin-out table

- Customer provided
- Our proposal

9. Artwork Film

- Yes
- No