

Customer:




Customer Mode:

Customer Approve By:

REV.

DESCRIPTION OF MODIFY

DATE

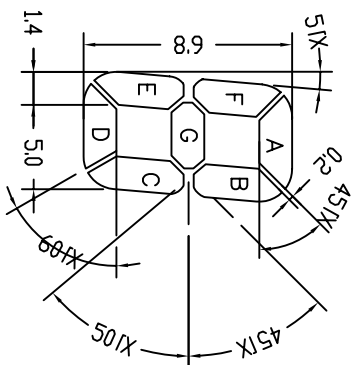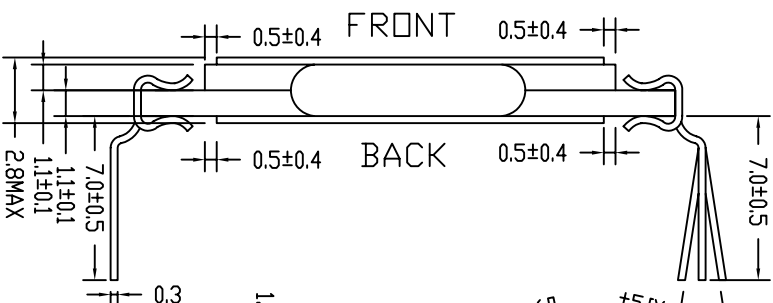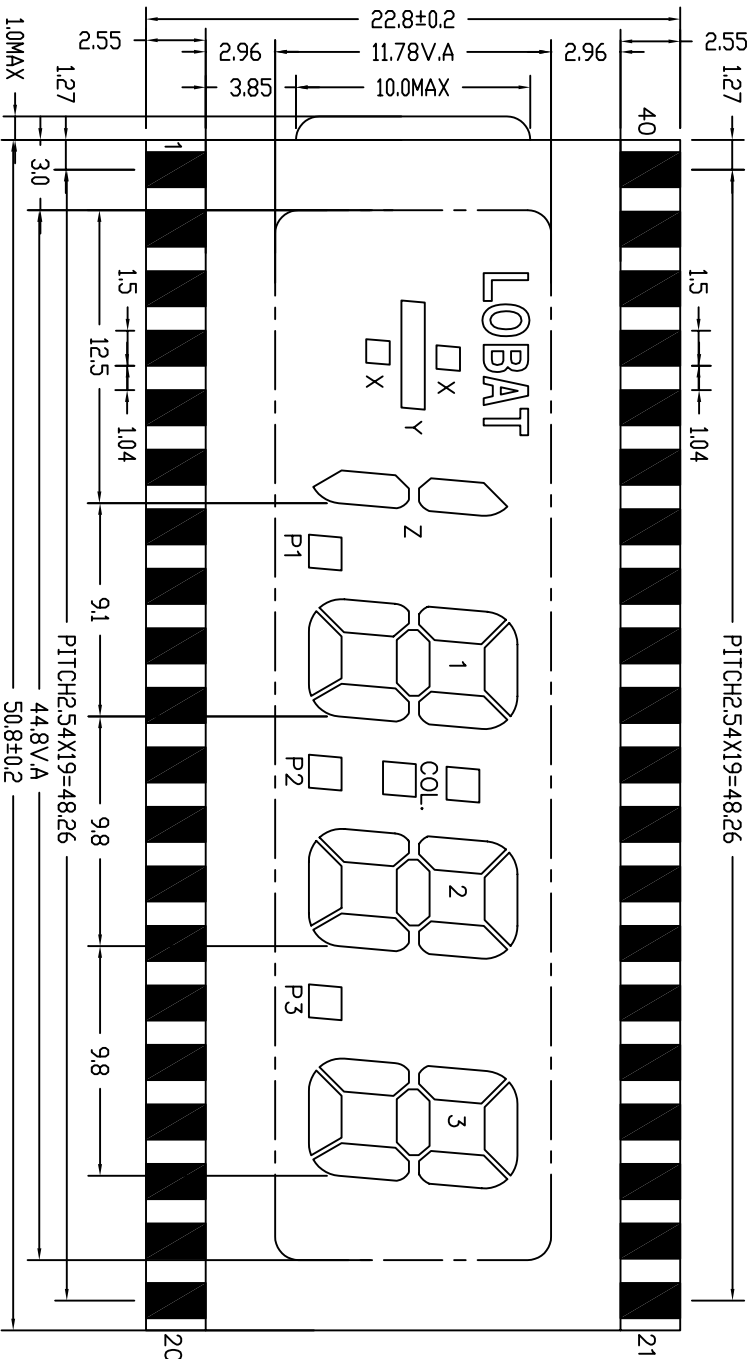

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM	COM	Y	Z	--	--	--	--	P1	1E	1D	1C	P2	2E	2D	2C	P3	3E	3D	3C	3B
PIN	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
COM	3A	3F	3G	2B	2A	2F	2G	COL	1B	1A	1F	1G	--	--	--	--	--	LOBAT	X	COM

DISPLAY TYPE : TN, POSITIVE MODE
 POLARIZER MODE : REFLECTIVE
 CONNECTOR : PIN

VIEW ANGLE : 6 O'CLOCK
 MULTIPLEX : 1/1 DUTY
 BIAS RATIO : 1/1 BIAS
 DISPLAY DRIVER :
 OPERATING VOLTAGE : 3 V
 OPERATING TEMP : 0°C TO +55°C
 STORAGE TEMP : -10°C TO +60°C

DRAWN BY : Laihehua 05-2-24

CHECKED BY :

APPROVE BY :



海南清华显示器件技术开发有限公司


HAINAN QINGHUA LCD TECHNOLOGY DEVELOPMENT CO., LTD

DWG NO. : HQ30627

REV: A0
SIZE: A4

SHEET: 1 OF 1

SCALE: NTS



UNITS: MM

TITL: CUSTOMER LCD